



PacE Pneumatic Flow Controller

Small Reciprocating Systems

The PacE Flow Controller from Ingersoll Rand manages flow to provide consistent pressure at point-of-use and to protect tools from over-pressurization.



The Cost of Unmanaged Pressure

Most compressed air systems experience fluctuating demand, which causes inconsistent pressure at point-of-use and jeopardizes the quality of finished products. Overcompensating by increasing system pressure or adding more compressors typically results in higher maintenance costs and increased damage to point-of-use tools.

PacE Flow Controller Benefits

- Consistent pressure at point-of-use
- Improved compressor and production tool life
- Less production waste; decreased downtime
- Reduced energy consumption

Small Air, Big Difference

The PacE Pneumatic Flow Controller creates a buffer between air supply and air demand. This allows for more effective air storage while continuously responding to demand fluctuations to actively stabilize system pressure.

PacE delivers consistent, reliable pressure at point-of-use to ensure production quality.



So Much More than a Standard Regulator


Unlike standard regulators, the PacE flow controller manages both pressure *and* flow. It can be used to manage unregulated demand across the entire system, not just at point-of-use.

- **Accuracy.** The PacE Flow Controller has a sensitive dial for controlling set points to deliver precise pressure control (0.2% from set point within the full range).
- **Constant Pressure.** The flow controller valve responds immediately to changes in air demand, providing consistent pressure at point-of-use.
- **Reduced Cycling.** By separating the supply side from the demand side of your system, the controller creates additional stored capacity so your machines won't cycle as frequently to meet fluctuations in demand.
- **No Over-Pressurization.** The fixed pressure setting on the dial prevents users from exceeding the maximum desired pressure, protecting point-of-use tools from over-pressurization.

PacE Pneumatic Flow Controller Specifications									
Inlet Size		Max Flow	Dimensions (inches)				Weight		
		scfm	A	B	C	D	E		
1/2"		75	8.11	7.28	8.57	7.36	1.89	8.4	
Inlet Size	Part Number	Flow Direction	Thread Type	Max Flow scfm	Max Inlet Pressure psig	Control Range psig	Temperature Range °F	Sensitivity % of full span	Repeatability % of full span
1/2"	49124399	Right to Left	NPT	75	300	0-160	-4 to +176	0.2%	± 0.5%
1/2"	49124365	Left to Right	NPT	75	300	0-160	-4 to +176	0.2%	± 0.5%
1/2"	49124456	Right to Left	BSP	75	300	0-160	-4 to +176	0.2%	± 0.5%
1/2"	49124423	Left to Right	BSP	75	300	0-160	-4 to +176	0.2%	± 0.5%

Product Features

- **Nitrile seals** for high level of chemical resistance
- **NPT threads** for easy installation with existing delivery systems
- **Glycerine-filled, stainless steel, dual gauge design** for clear reference of pressure (both inlet and outlet)
- **Powder-coated steel chassis** for premium durability
- **Versatile directional flow** available
- **Compatible** with rotary and reciprocating technologies
- **Suitable up to 300 psig** inlet pressure

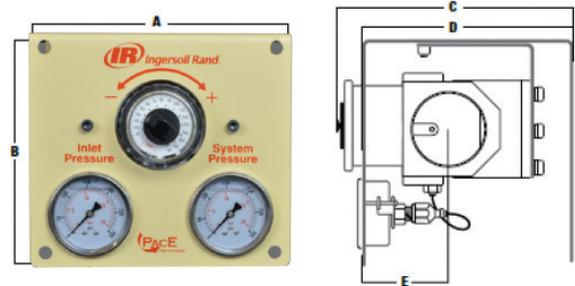

ingersollrandproducts.com

Ingersoll Rand (NYSE:IR) advances the quality of life by creating comfortable, sustainable and efficient environments. Our people and our family of brands—including Club Car®, Ingersoll Rand®, Thermo King® and Trane®—work together to enhance the quality and comfort of air in homes and buildings; transport and protect food and perishables; and increase industrial productivity and efficiency. We are a \$13 billion global business committed to a world of sustainable progress and enduring results.



Ingersoll Rand, IR and the IR logo are trademarks of Ingersoll Rand, its subsidiaries and/or affiliates. All other trademarks are the property of their respective owners. Ingersoll Rand compressors are not designed, intended or approved for breathing air applications. Ingersoll Rand does not approve specialized equipment for breathing air applications and assumes no responsibility or liability for compressors used for breathing air service. Ingersoll Rand assumes no responsibility or liability for compressors used in any application other than compressed air. Nothing contained on these pages is intended to extend any warranty or representation, expressed or implied, regarding the product described herein. Any such warranties or other terms and conditions of sale of products shall be in accordance with Ingersoll Rand's standard terms and conditions of sale for such products, which are available upon request. Product improvement is a continuing goal at Ingersoll Rand. Designs, available functions and specifications are subject to change without notice or obligation.